

MPL-M8

PUSH AROUND VERTICAL LIFT - SINGLE MAST



Standard Configuration

- Ground and platform control
- Auxiliary lowering device
- Emergency Stop Button
- Large Gradiometer
- Double Limit Switches
- Screw type outriggers
- Short circuit and leakage protection system

Optional Configuration

- Lifting power: DC24V power or Manual
- High grade hydraulic station
- Explosion protection system
- Stainless steel guardrail
- Electric driving power



MPL-M8

PUSH AROUND VERTICAL LIFT - SINGLE MAST



Model	MPL-M8	MPL-M10	MPL-M11	MPL-M12	
Max. working height	8m	10m	11m	12m	
Max. platform height	6m	8m	9m	10m	
Platform size	0.60 x 0.55m	0.60 x 0.55m	0.60 x 0.55m	0.60 x 0.55m	
Outrigger footprint	1.7 x 1.67m	1.7 x 1.67m	1.93 x 1.77m	1.93 x 1.77m	
Overall length (Stowed)	1.34m	1.34m	1.45m	1.45m	
Overall width (Stowed)	0.85m	0.85m	0.85m	0.85m	
Overall height (Stowed)	2m	2m	2m	2m	
Platform capacity (SWL)	130kg	130kg	130kg	130kg	
Ground clearance	0.05m	0.05m	0.05m	0.05m	
Weight	370kg	390kg	400kg	420kg	
Max. no of person	1	1	1	1	
Lifting motor (AC)	Power source	0.75kW	0.75kW	0.75kW	1.1kW
Optional configuration	Lifting motor (DC)	24V/80Ah	24V/80Ah	24V/80Ah	24V/80Ah
		0.80kW	0.80kW	0.80kW	0.80kW
	Charger	24V/15A	24V/15A	24V/15A	24V/15A



Double Limit Switches




Electric Cabinet




Fixture for Platform Guardrail



Gradienter



Limiting Screw for Outriggers

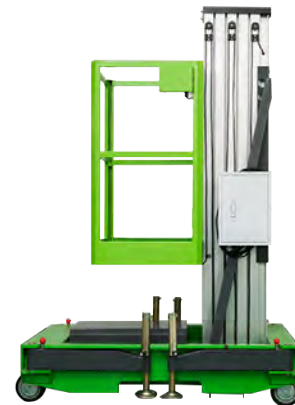

Delivering Safety & Productivity

Chennai | Bengaluru | Mumbai | Ahmedabad | Delhi | Kolkata | Sri Lanka | Qatar

equipment@mtandt.com

90901 01065

www.mtandt.com