
## **SNORKEL**

# UL25/UL32/UL40

# **PUSH AROUND MAST LIFTS**



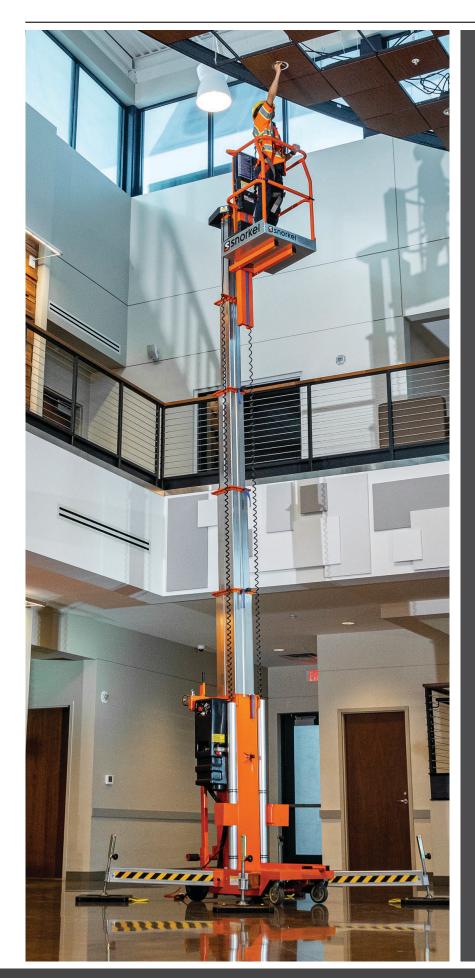

- Robust push-around mast lifts
- Patented Girder Lock mast design for stable working up to 14.1m
- Compact dimensions
- Passes through a standard doorway
- Easy loader system for flatbed vehicle transport

### **SNORKEL**

# UL25/UL32/UL40

## **PUSH AROUND MAST LIFTS**




DIMENSIONS	UI25	UL32	UL40
Max. working height	9.6m	11.7m	14.1m
Max. platform height (A)	7.6m	9.7m	12.1m
Platform length	0.56m	0.56m	0.56m
Platform width	0.66m	0.66m	0.66m
Outrigger footprint (B x C)	2.06m x 1.99m	2.06m x 1.99m	2.95m x 2.85m
Overall width (F)	0.74m	0.74m	0.74m
Overall length (D)	1.26m	1.32m	1.32m
Stowed height (E)	1.99m	2.51m	2.9m
Tilt back height (G)	1.95m	1.95m	2.0m
Tilt back length (H)	2.6m	2.64m	2.99m


PERFORMANCE				
Platform capacity (SWL)	159kg	136kg	136kg	
Max. wind speed	0m/s	0m/s	0m/s	
Raise/lower time	43/23 sec	57/26 sec	60/40 sec	
Wheels	250mm x 6	250mm x 64mm rear, 150mm casters front		
Controls		push button		
Wall access (Distance from platform front to wa	356mm	356mm	736mm	

POWER	
Power source (AC)	120/220V AC 50HZ
Power source (DC)	1 X 12V 105Ah battery

WEIGHT			
Weight (AC)	390kg	435kg	470kg
Weight (DC)	420kg	465kg	500kg

### OUTRIGGER FOOTPRINT





#### **STANDARD FEATURES**

- Patented Girder Lock telescopic mast system
- Integrated tilt-back system
- Ground level entry
- EZ loader system for transport
- Outrigger interlock indicators
- Integrated battery charger (DC only)
- Non-marking wheels and casters
- 2 year parts & labour, 5 year structural warranty
- CE approved

#### **OPTIONS**

- Special paint colours
- Tool tray
- Environmental hydraulic oil

CE Specification Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes 
© Snorkel 2020 only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance.

