

**ATN**

# PIAF10RE

**VERTICAL MAST BOOM LIFT**



## MAIN FEATURES

Working height ..... 9.92 m / 32.54ft  
Horizontal outreach ..... 3.51m / 11.51ft  
Chassis width ..... 1.00m / 3.28ft  
0 Tail swing  
Electric drive


## ▲ STANDARD EQUIPMENT

- Non-marking rubber wheels
- Platform with protection bar
- 200kg load capacity
- 24V 215 Ah Battery
- Centralized battery filling
- On-board H/F charger
- Non-continuous 356 ° turret rotation
- 25% gradeability
- Possible to work at maximum height
- On-board diagnostic colour LCD console
- Sling and tow rings
- Battery charge indicator
- Tilt indicator with alarm
- Overload sensor
- Flashing lights
- Hour meter

## ★ ACCESSORIES & OPTIONS

- Easy access to the platform by an entry gate
- Compressed air line
- Power supply in the platform
- Movement cut off when tilt > 2°
- Motion alarm
- Anti-crushing (ACS) system
- Customer colour(s) paint

# ATN PIAF10RE VERTICAL MAST BOOM LIFT

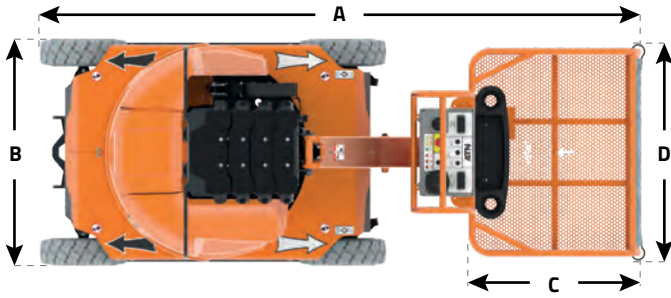

Working height	9.92m / 32.54ft
Floor height	7.92m / 25.98ft
Maximum horizontal outreach	3.51m / 11.51ft
Load capacity (Interior, 2 people, wind 0 km/h)	200kg / 441lbs
Load capacity (Exterior, 1 people, wind < 45km/h)	200kg / 441lbs

<b>A</b> Length	2.78m / 9.12ft
<b>B</b> Chassis width	1.00m / 3.28ft
<b>C</b> Platform length	0.80m / 2.62ft
<b>D</b> Platform width	0.93m / 3.05ft
<b>E</b> Height	1.99m / 6.52ft
<b>F</b> Wheelbase	1.20m / 3.93ft
<b>G</b> Ground clearance	8.2cm / 0.27ft

Turret rotation	356° NC
Drive speed (stowed)	5.5km/h / 3.41mph
Drive speed (raised)	0.9km/h / 0.56mph
Gradeability (stowed)	25%
Maximum tilt	2°
Inside turning radius (Ri)	0.52m / 1.70ft
Outside turning radius (Re)	2m / 6.56ft
Total weight	2850kg / 6283lbs
Ground pressure	932kN/m <sup>2</sup>

P10E

