

ATN

PIAF13RE

VERTICAL MAST BOOM LIFT



MAIN FEATURES

Working height..... 12.65m / 41.50ft
Horizontal outreach..... 6.05m / 19.85ft
Gradeability..... 30 %
0 Tail swing
Electric drive

▲ STANDARD EQUIPMENT

- Non-marking rubber wheels
- Platform with protection bar
- 200kg load capacity
- 48V 260 Ah Battery
- On-board H/F charger
- Centralized battery filling
- Non-continuous 352° turret rotation
- 30% gradeability
- Possible to work at maximum height
- On-board diagnostic colour LCD console
- Sling and tow rings
- Battery charge indicator
- Tilt indicator with alarm
- Overload sensor
- Flashing lights
- Hour meter



★ ACCESSORIES & OPTIONS

- Easy access to the platform by an entry gate
- Compressed air line
- Power supply in the platform
- Automatic 110 / 220 V charger
- Movement cut off when tilt > 2°
- Motion alarm
- Food grade oil
- Biodegradable oil
- Motion and movement alarm
- Anti-crushing (ACS) system
- Customer colour(s) paint

ATN

PIAF13RE

VERTICAL MAST BOOM LIFT

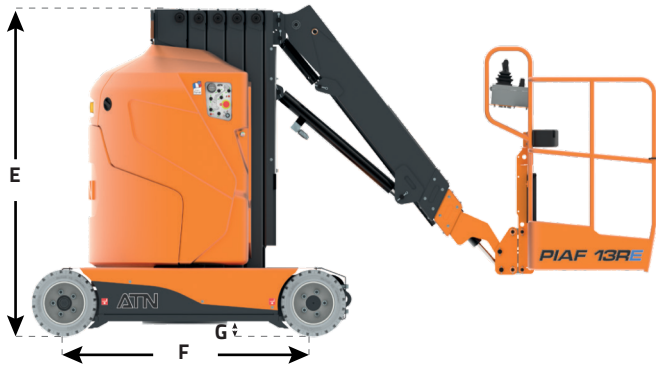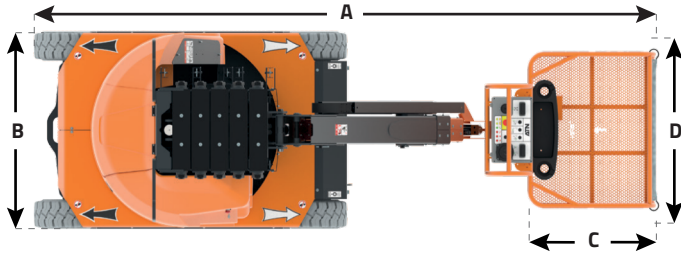

Working height	12.65m / 41.50ft
Floor height	10.65m / 34.94ft
Maximum horizontal outreach	6.05m / 19.85ft
Load capacity (Interior, 2 people, wind 0 km/h)	200kg / 441lbs
Load capacity (Exterior, 1 people, wind < 45km/h)	200kg / 441lbs

A Length	3.72m / 12.20ft
B Width	1.20m / 3.93ft
C Platform length	0.80m / 2.62ft
D Platform width	0.93m / 3.05ft
E Height	1.98m / 6.49ft
F Wheelbase	1.55m / 5.08ft
G Ground clearance	8cm / 0.26ft

Turret rotation	352° NC
Drive speed (stowed)	6km/h / 3.72mph
Drive speed (raised)	0.9km/h / 0.56mph
Gradeability (stowed)	30%
Maximum tilt	2°
Inside turning radius (Ri)	0.66m / 2.16ft
Outside turning radius (Re)	2.49m / 8.16ft
Total weight	5140kg / 11331lbs
Ground pressure	1750kN/m ²

