

SNORKEL

TM12

SELF-PROPELLED TELESCOPIC MAST LIFT



- Industry-leading self-propelled telescopic mast lift
- Versatile, robust and simple to use
- Drives through a standard doorway
- 0.5m roll-out extension deck
- Ideal for many applications – from construction to stockpicking!

SNORKEL

TM12

SELF-PROPELLED TELESCOPIC MAST LIFT




DIMENSIONS	TM12
Max. working height	5.6m
Max. platform height (A)	3.6m
Platform size (stowed)	0.74m x 0.96m
Platform size (extended) (E)	0.74m x 1.46m
Extension deck length	0.5m
Overall width (B)	0.76m
Overall length (D)	1.34m
Stowed height (C)	1.62m
Ground clearance	76mm

PERFORMANCE	
Platform capacity (SWL)	227kg
Max. drive height	3.6m
Max. wind speed	12.5m/s
Max. drive speed (stowed)	3.2km/h
Max. drive speed (elevated)	0.43km/h
Raise/lower time	16/19 sec
Gradeability	25%
Max. operating slope (side to side)	1.5°
Max. operating slope (front to back)	2°
Inside turning radius	0.36m
Outside turning radius	1.55m
Tyres	279mm non-marking rubber
Parking brake	2 wheel, spring-applied, hydraulically-released with manual overdrive
Drive system	dual front hydraulic motors
Controls	proportional

POWER	
Power source	24V 4hp DC electric motor 4-220 Ah batteries
Battery charger	18 amp


WEIGHT	
Weight	830kg

TURNING RADIUS

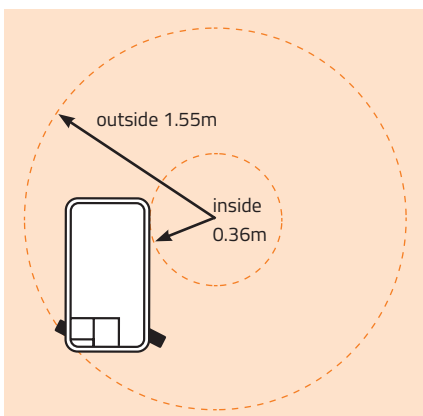

CE Specification
© Snorkel 2020

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance.

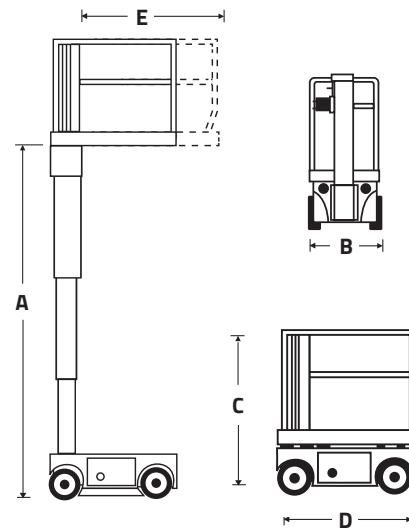

STANDARD FEATURES

- Roll-out deck extension
- Hydraulically powered descent
- Proportional controls
- Saloon-door style entry gates
- Descent and tilt alarms
- Emergency lowering at chassis controls
- Non-marking rubber tyres
- Crane lift points
- Horn
- 2 persons indoor
- 1 person outdoor
- Selectable motion alarm
- Integrated battery charger 90V-240V 25A
- Hour meter & on-board diagnostics display
- 2 year parts & labour, 5 year structural warranty
- CE approved

OPTIONS

- Special paint colours
- Environmental hydraulic oil
- 2° side to side operating slope upgrade (machine weight 910kg)



Delivering Safety & Productivity

Chennai | Bengaluru | Mumbai | Ahmedabad | Delhi | Kolkata | Sri Lanka | Qatar

equipment@mtandt.com | 90901 01065 | www.mtandt.com