




Hygienic & Reinforced Injection & Roto Moulding Plastic Pallets

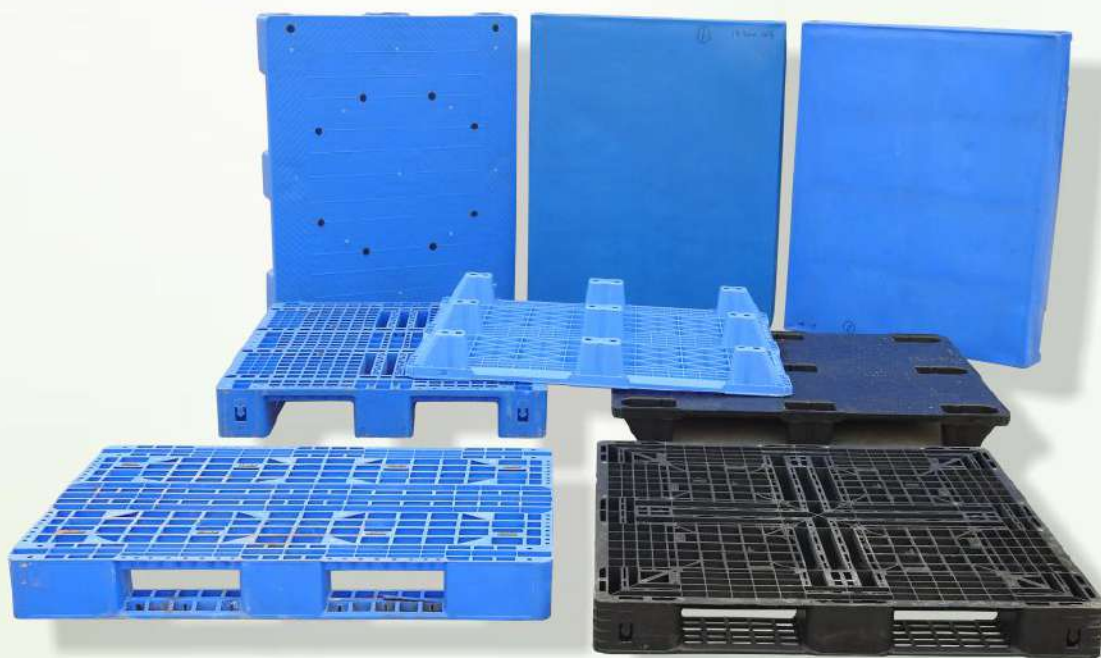

Packaging & Material Handling Solutions

Roto Moulding Pallets Specifications


1200 X 1200 X 160 MM



MODEL	TYPE	TOP STYLE	LOAD CAPACITY		
			STATIC	DYNAMIC	RACKING
2 WAY	PUFF + STEEL	PLAIN	3000	1000	1000
4 WAY &	ONLY PUFF	ANTISKID	3000	1000	NA
EURO 2 WAY	ONLY STEEL	SIDE EDGE	4000	1200	1200

1200 X 1000 X 160 MM

MODEL	TYPE	TOP STYLE	LOAD CAPACITY		
			STATIC	DYNAMIC	RACKING
2 WAY	PUFF + STEEL	PLAIN	3000	1000	1000
4 WAY &	ONLY PUFF	ANTISKID	2500	500	NA
EURO 2 WAY	ONLY STEEL	SIDE EDGE	4000	1200	1200



1000 X 1000 X 160 MM



MODEL	TYPE	TOP STYLE	LOAD CAPACITY		
			STATIC	DYNAMIC	RACKING
2 WAY	PUFF + STEEL	PLAIN	3000	1000	1000
4 WAY	ONLY PUFF		2500	500	NA

Roto Moulding Pallets Specifications


900 X 900 X 160 MM




MODEL	TYPE	TOP STYLE	LOAD CAPACITY		
			STATIC	DYNAMIC	RACKING
2 WAY	PUFF + STEEL	PLAIN	3000	1000	1000
4 WAY	ONLY PUFF		2500	500	NA

800 X 1200 X 160 MM

MODEL	TYPE	TOP STYLE	LOAD CAPACITY		
			STATIC	DYNAMIC	RACKING
2 WAY	PUFF + STEEL	PLAIN	3000	1000	1000
EURO 2 WAY	ONLY PUFF	ANTISKID	3000	1000	1000



800 X 800 X 160 MM



MODEL	TYPE	TOP STYLE	LOAD CAPACITY		
			STATIC	DYNAMIC	RACKING
2 WAY	PUFF + STEEL	PLAIN	3000	1000	1000
	ONLY PUFF	ANTISKID	3000	500	NA

*** LOAD BEARING CAPACITY CAN BE CUSTOMIZED AS PER CUSTOMER REQUIREMENT**

Injection Moulding Pallets Specifications

1200X 1000 X 160 MM With Steel Bones



MODEL	MATERIAL	TOP SURFACE	LOAD CAPACITY		
			STATIC	DYNAMIC	RACKING
TPPL - 01	HDPE/PP	Perforated 3 Runner	6000 kg Unified Load	1200 kg Unified Load	1200 kg Unified Load

Entry: 

1200X 1000 X 160 MM With Steel Bones



MODEL	MATERIAL	TOP SURFACE	LOAD CAPACITY		
			STATIC	DYNAMIC	RACKING
TPPL - 02	HDPE/PP	Perforated 3 Runner	4000 kg Unified Load	1000 kg Unified Load	1000 kg Unified Load

Entry: 

1200X 1000 X 160 MM



MODEL	MATERIAL	TOP SURFACE	LOAD CAPACITY		
			STATIC	DYNAMIC	RACKING
TPPL - 03	HDPE/PP	Perforated 3 Runner	3000 kg Unified Load	750 kg Unified Load	500 kg Unified Load

Entry: 

Injection Moulding Pallets Specifications

1200X 1000 X 135 MM



MODEL	MATERIAL	TOP SURFACE	LOAD CAPACITY		
			STATIC	DYNAMIC	RACKING
TPPL - 04	HDPE/PP	Plain Top 9 Leg	3000 kg Unified Load	750 kg Unified Load	NA

Entry: 

1200X 1000 X 135 MM (Export Purpose)



MODEL	MATERIAL	TOP SURFACE	LOAD CAPACITY		
			STATIC	DYNAMIC	RACKING
TPPL - 05	HDPE/PP	Perforated 9 Leg	2000 kg Unified Load	1000 kg Unified Load With Wrapping	NA

Entry: 

1200X 1000 X 135 MM (Export Purpose)




MODEL	MATERIAL	TOP SURFACE	LOAD CAPACITY		
			STATIC	DYNAMIC	RACKING
TPPL - 06	HDPE/PP	Plain Top 9 Leg	2000 kg Unified Load	1000 kg Unified Load With Wrapping	NA

Entry: 

Injection Moulding Pallets Specifications


1200X 800 X 135 MM

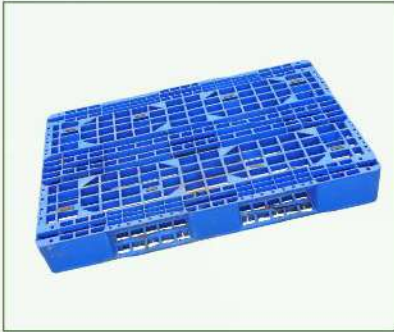

MODEL	MATERIAL	TOP SURFACE	LOAD CAPACITY		
			STATIC	DYNAMIC	RACKING
TPPL - 07	HDPE/PP	Perforated 3 Runner	3000 kg Unified Load	750 kg Unified Load	NA

Entry: 

1200X 1000 X 135 MM (Export Purpose)

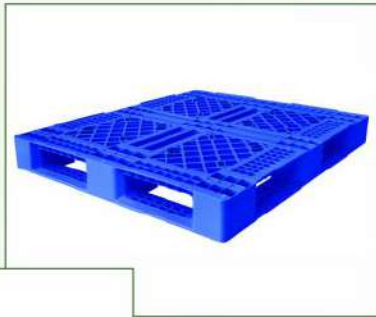


MODEL	MATERIAL	TOP SURFACE	LOAD CAPACITY		
			STATIC	DYNAMIC	RACKING
TPPL - 08	HDPE/PP	Perforated Top 6 Runner	2000 kg Unified Load	1000 kg Unified Load With Wrapping	NA

Entry: 



1100X 1100 X 120 MM (Export Purpose)

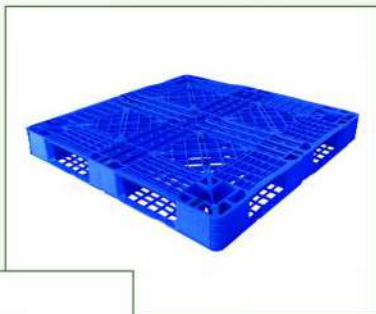

MODEL	MATERIAL	TOP SURFACE	LOAD CAPACITY		
			STATIC	DYNAMIC	RACKING
TPPL - 09	HDPE/PP	Perforated 6 Runner	2000 kg Unified Load	1000 kg Unified Load With Wrapping	NA

Entry: 



Twinkle Papers Pvt. Ltd

Corporate Office : Ludhiana Road, Malerkotla - 148023 (Punjab)
 Phone No. : +91-98154-00793, +91-98156-01142, +91-98762-66413
 E-mail Id : nasreen@twinklepapers.com, vmv@twinklepapers.com
 ashish@twinklepaper.com
 Website : www.twinklepapers.com